


DAIHAN-brand® Multi-speed Rotary Viscometer-full Set, "WVM-0.6M" & "WVM-6M", 1~6,000,000 cP **NEW**
 멀티 스피드 디지털 회전 점도계, with Calibration Certificate & Standards Spindle-kit(LV1~4), Lifting Stand, Hand Handling Case, 0.1~100rpm



(1) for 1~600,000cP, "W VM-0.6M" Full Set
 (2) for 1~6,000,000cP, "WVM-6M" Full Set

- Ideal for measuring the Viscosity of Various Liquid such as Grease, Painting, Foodstuff, Dope, Paper making, Cosmetics, Chemical industry, Capsule Stickiness Agent and Medicines.
 - Included ASTM Standard Spindle-kit of 4 Ea. : LV1 : 15~20K, LV2 : 50~100K, LV3 : 200~400K, LV4 : 1K~2M
 - Direct Readout of all Measurement Parameters on an illuminated LCD.
 - Included Easy to Use Lifting Stand
 - Available Pre-sets speeds, 0.1~100 rpm
 - Auto Range Function to determine the Maximum Viscosity with each Spindle / Speed Combination.
 - Safety Protection Against Sudden Rises in the Power Supply.
- * Data on screen : • Speed Selected : RPM • Spindle Selected : S.P.
 • Viscosity Reading : cP(mPa.s) • Percentage of Full Scale : %
 • Sample Temperature : °C
- * Viscosity Reading: Dynamic Viscosity (cP or mPa.s)
 * The Viscometer and the PT100 can be calibrated by the User.
 * Ultra-sensitive Front Keyboard that allows Easy Input of all Parameters.
 * Error Message in the Screen with Sound Alarm when the Viscosity of the Test Material exceeds the Full Scale of the selected Combination(SP / rpm.)
 * Sound Alarm if the Equipment is Working at Under 20% of Selected full Scale
 * Direct reading in cP(mPa.s) * without Limits
 * Can be Use with Various Optional Accessories : RTD Temp. Probe, Micro Printer, Small Sample Adapter, Standard Oil(Optional)

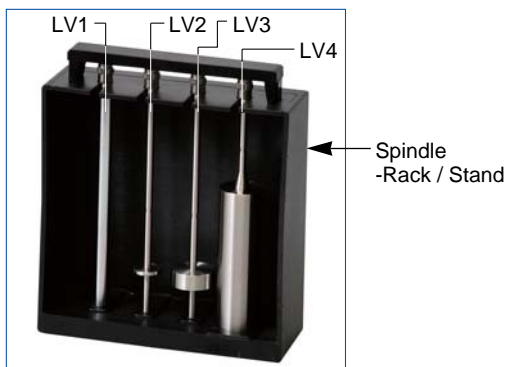

(3) LV1 ~ 4 Spindle kit :
 Included for "WVM-0.6M" & "WVM-6M" Meter

Specification

Model	(1) "WVM-0.6M"	(2) "WVM-6M"
Viscosity Range cP(mPa.s)	1 ~ 600,000cP	1 ~ 6,000,000cP
Speed Range (RPM)	0.1 ~ 100	0.1 ~ 100
Certificate	with Individual Calibration Certificate	
Certificate	Included Standard Spindle-kit(LV1~LV4), Stainless-steel ① LV1 : 15 ~ 20,000cP ② LV2 : 50 ~ 100,000cP ③ LV3 : 200 ~ 400,000 cP ④ LV4 : 1,000 ~ 2,000,000cP	
Measurement Error	±5% (Newton Liquid)	
Accuracy	±1.0% of range	
Repeatability	±0.5%	
Ambient Temperature	5°C ~ 35°C Relative Humidity : ≤80%	
Weight	4 kg	
Power Supply	AC 220V, 50/60Hz	

* K=1,000 cP(mPa.s), M =1,000,000 cP(mPa.s)

Ordering Information

(1) for 1~600,000cP "WVM-0.6M" Viscometer-full Set
 DH.WV1021 Viscometer-full Set, Multi-speed, "WVM-0.6M" Ea. Price, ₩ 2,680,740

(2) for 1~6,000,000cP "WVM-6M" Viscometer-full Set
 DH.WV1022 Viscometer-full Set, Multi-speed, "WVM-6M" Ea. Price, ₩ 3,207,680

Spare Accessories

DH.WV2011 (3) Standard LV Spindle kit, LV1~4, Ea. Price, ₩ 393,300
 LV1 : 15 ~ 20K, LV2 : 50 ~ 100K, LV3 : 200 ~ 400K, LV4 : 1K ~ 2M
 ※ LV0 Spindle for 1~15cP : Option

Optional Accessories

DH.WV2041 (4) RTD Temp. Probe, 0.0~100.0°C, Accu. ±0.1, Resolution 0.1°C Ea. Price, ₩ 54,190
 DH.WV2042 (5) Small Sample Adapter, Stainless-steel, 1~10cp, 25ml 785,290
 DH.WV2043 (6) Micro Printer, with RS-232, USB 1.5m Cable 189,840
 (Print Information : Temp., RPM, Spindle, Torque, Viscosity)
 (7) Standard Oils cP(mPa.s) 400ml :

※ The Details for Order : Please See the Last Page of Viscometers



(4) RTD Temp. Probe



(5) Small Sample Adapter



(6) Micro Printer, w/Cable



(7) Standard Oils